



冷卻水塔

特點:

- 1. FRP 結構，堅固耐用，壽命長。
- 2. 採全密閉屋外特殊型馬達，運轉低噪音，可長期於惡劣環境下運轉。




渦流泵浦




直立式高壓泵浦

冷卻水塔

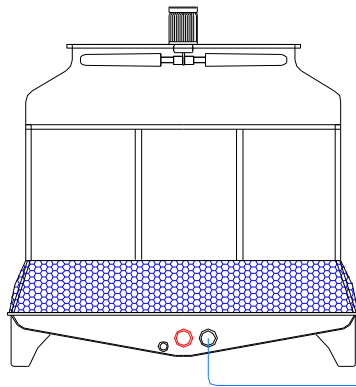

泵浦

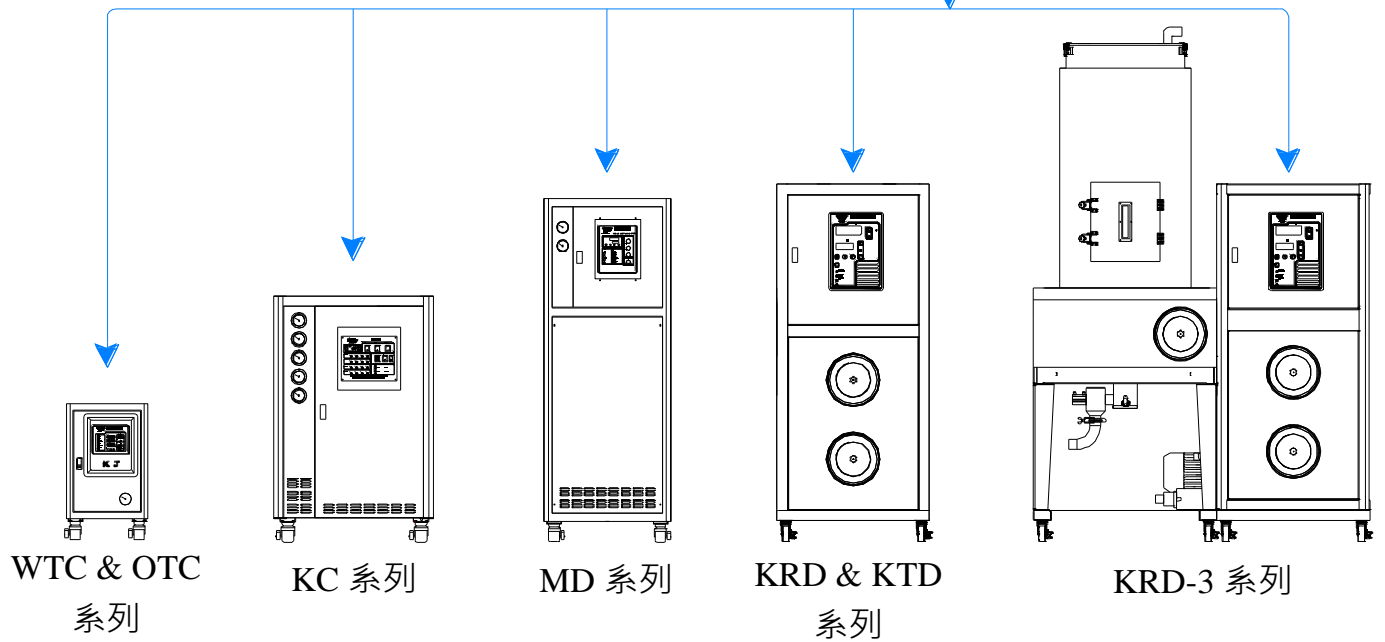



冷卻水塔規格表

1 of 2

機型		LBC-3	LBC-5	LBC-8	LBC-10	LBC-15	LBC-20	LBC-25	LBC-30
冷卻能力	KCAL/HR	11,700	19,500	31,200	39,000	78,000	58,500	97,500	117,000
循環水量	LPM	39	65	104	130	260	195	325	390
冷卻風車	KW	0.13	0.13	0.13	0.19	0.19	0.38	0.56	0.75
配管管徑 (MM)	Inlet	40	40	40	40	50	50	65	65
	Outlet	40	40	40	40	50	50	65	65
	Drain	20	20	25	25	25	25	50	50
	Over flow	25	25	25	25	25	25	25	25
	Auto filler	15	15	15	15	15	15	15	15
	Manual filler	15	15	15	15	15	15	15	15
最大消耗電力	KW	0.1	0.1	0.1	0.2	0.4	0.2	0.6	0.8
外型尺寸	CM	φ 75*141	φ 75*141	φ 86*169	φ 86*169	φ 117*194	φ 117*194	φ 138*180	φ 158*174
略重	KG	36	40	50	55	90	80	103	115
機型		LBC-40	LBC-50	LBC-60	LBC-70	LBC-80	LBC-100	LBC-125	LBC-150
冷卻能力	KCAL/HR	156,000	195,000	234,000	273,000	312,000	390,000	487,500	585,000
循環水量	LPM	520	650	780	910	1,040	1,300	1,625	1,950
冷卻風車	KW	1.13	1.13	1.13	1.13	1.50	2.25	2.25	3.75
配管管徑 (MM)	Inlet	65	80	80	100	100	100	125	125
	Outlet	65	80	80	100	100	100	125	125
	Drain	50	50	50	50	50	50	50	50
	Over flow	25	25	25	25	25	25	50	50
	Auto filler	20	20	20	20	20	25	25	25
	Manual filler	20	20	20	25	25	25	25	25
最大消耗電力	KW	1.1	1.1	1.1	1.1	1.5	2.3	2.3	3.8
外型尺寸	CM	φ 182*189	φ 200*189	φ 200*190	φ 218*205	φ 218*205	φ 265*224	φ 305*226	φ 330*232
略重	KG	168	197	229	277	292	403	466	625
選擇配備	1.冷卻水泵浦		2.直立式高壓泵浦						
備註	1.冷卻能力系以入口水溫 37°C，出口水溫 32°C，外氣濕球(W.B)27°C 之條件下設計。 2.型錄僅供參考，若有任何修改，恕不另行通知。								



冷卻水塔規格表

機型		LBC-175	LBC-200	LBC-225	LBC-250	LBC-300	LBC-350	LBC-400	LBC-500
冷卻能力	KCAL/HR	682,500	780,000	877,500	975,000	1,170,000	1,365,000	1,560,000	1,950,000
循環水量	LPM	2,275	2,600	2,925	3,250	3,900	4,550	5,200	6,500
冷卻風車	KW	3.75	3.75	5.63	5.63	7.50	7.50	11.25	11.25
配管管徑 (MM)	Inlet	125	150	150	200	200	200	200	250
	Outlet	125	150	150	200	200	200	200	250
	Drain	50	50	50	50	50	50	50	50
	Over flow	50	50	50	50	50	50	100	100
	Auto filler	25	32	32	32	32	32	50	50
	Manual filler	25	32	32	32	32	32	50	50
最大消耗電力	KW	3.8	3.8	5.6	5.6	7.5	7.5	11.3	11.3
外型尺寸	CM	φ 330*252	φ 377*299	φ 377*319	φ 377*319	φ 444*335	φ 479*339	φ 518*389	φ 558*393
略重	KG	713	870	960	1,030	1,283	1,362	2,171	2,428

機型		LBC-600	LBC-700	LBC-800	LBC-1000	LBC-1250	LBC-1500
冷卻能力	KCAL/HR	2,340,000	2,730,000	3,120,000	3,900,000	4,875,000	5,850,000
循環水量	LPM	7,800	9,100	10,400	13,000	16,250	19,500
冷卻風車	KW	15.00	15.00	22.50	22.50	30.00	37.50
配管管徑 (MM)	Inlet	250	250	300	300	300	350
	Outlet	250	250	300	300	300	350
	Drain	50	50	80	80	80	80
	Over flow	100	100	100	100	100	100
	Auto filler	50	50	50	50	65	65
	Manual filler	50	50	50	50	65	65
最大消耗電力	KW	15.0	15.0	22.5	22.5	30.0	37.5
外型尺寸	CM	φ 600*436	φ 660*461	φ 760*495	φ 760*515	φ 843*587	φ 843*610
略重	KG	3,364	3,567	4,380	4,636	6,554	7,000

選擇配備

1.冷卻水泵浦

2.直立式高壓泵浦

備註

1.冷卻能力系以入口水溫 37°C，出口水溫 32°C，外氣濕球(W.B)27°C 之條件下設計。
2.型錄僅供參考，若有任何修改，恕不另行通知。