
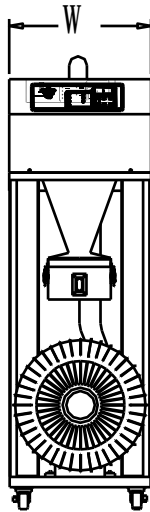




AUTO LOADER

FEATURES:

1. The motor cabinet and material receiver are designed separately for convenient operation.
2. Well designed protection for electricity, motor and material shortage alarm.
3. Compact designed for cartridge filter & vortex cyclone to reduce the times of cleaning filters.
4. Microprocessor controller monitors the operation status easily.

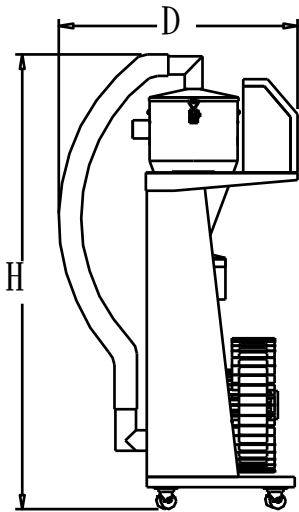


KAL-10~50

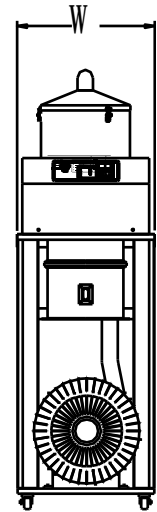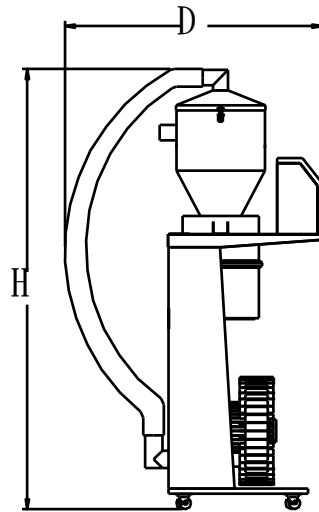

KAL-75

FLOWCHART:

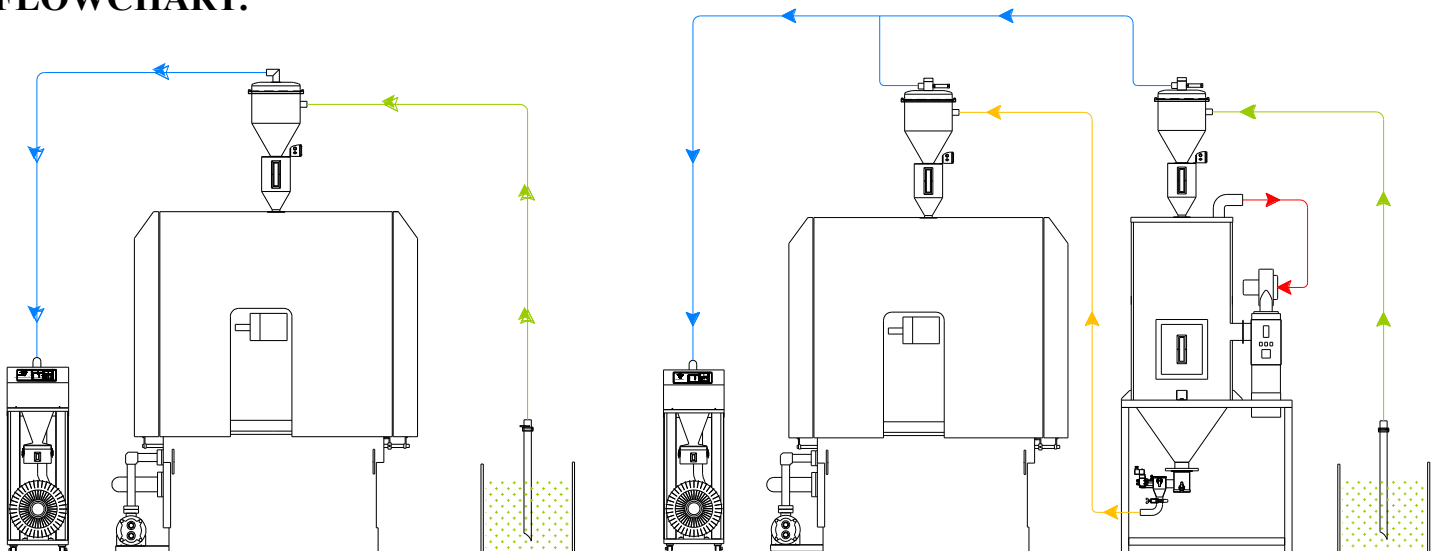



SPECIFICATIONS

Model	One-station	KAL-10			KAL-25			KAL-35			KAL -50			KAL -75			
	Two-station	KAL-10-2			KAL-25-2			KAL-35-2			KAL -50-2			KAL -75-2			
Motor	Type		Three phases induction motor														
	60 HZ	KW	0.85			1.90			2.60			3.70			6.30		
	50 HZ		0.75			1.75			2.20			3.40			5.50		
Loading capacity (KG/HR)	Loading height		4M	6M	8M	4M	6M	8M	4M	6M	8M	4M	6M	8M	4M	6M	8M
	One-station	60 HZ	200	—	—	350	250	—	600	450	—	600	450	300	1,200	1,100	900
		50 HZ	100	—	—	200	130	—	400	250	—	400	250	150	1,000	750	500
	Two-station	60 HZ	400	—	—	700	500	—	1,200	900	—	1,200	900	600	2,400	2,200	1,800
50 HZ		200	—	—	400	260	—	800	500	—	800	500	300	2,000	1,500	1,000	
Vortex cyclone		MM	φ 250*698											φ 350*960			
Filter area		M ²	0.411											1.196			
Vacuum piping		INCH	2											2.5			
Total load	60 HZ	KW	0.9			1.9			2.6			3.7			6.3		
	50 HZ		0.8			1.8			2.2			3.4			5.5		
Dimension (W*D*H)		CM	40*70*130											54*100*170			
Approx. weight		KG	60			63			70			73			138		
Options		1.Material receiver 2.Suction box 3.Spring hose (For dried material)															
Remarks		1.Loading capacity is estimated by different loading height at 10 meters loading length. 2.Loading capacity is varied by the density & shape of the plastic material, loading height & length, power frequency and other factors. 3.We reserve the right to change specifications without prior notice.															